





NEW PRODUCT


- Constructed of 99.4% Aluminum for maximum conductivity.
- Standard NEMA bolt spacing,
- Optional Captive hardware for Hot Stick applications.
- Captive hardware is factory assembled and consists of Alu. Flange nuts and Bolts
- Corrosion Inhibitor grease applied at factory.

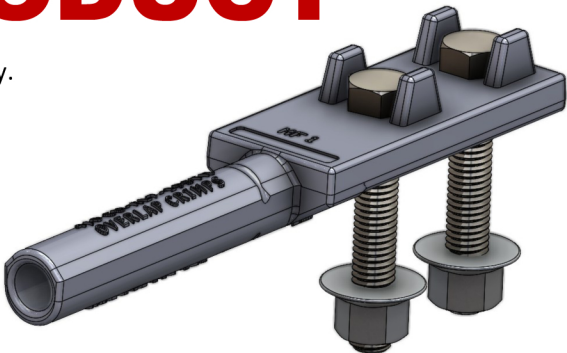

No Hardware (-NH) Option

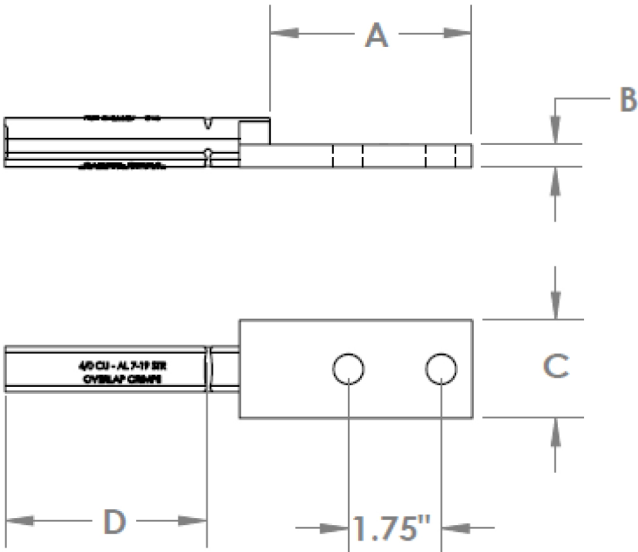

Captive Hardware / Hot-Stick Option

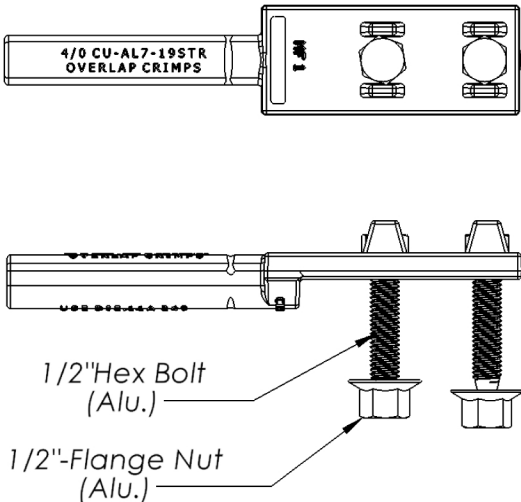

| PART #     | WIRE SIZE         |             | DIMENSIONS |       |       |       | Hardware                    |
|------------|-------------------|-------------|------------|-------|-------|-------|-----------------------------|
|            |                   |             | A          | B     | C     | D     |                             |
| CPD-40     | 4/0 FLEX 19 str.  | .517"-.528" | 3.75"      | .46"  | 1.87" | 3.8"  | 1/2"-13 Bolt & 3/4" Hex Nut |
| CPD-40-NH  | 4/0 FLEX 19 str.  | .517"-.528" | 3.75"      | .46"  | 1.87" | 3.8"  | None                        |
| CPD-556    | 556.5 ACSR- 24/7  | .914"       | 3.8"       | .625" | 1.85" | 4.15" | 1/2"-13 Bolt & 3/4" Hex Nut |
| CPD-556-NH | 556.5 ACSR - 24/7 | .914"       | 3.8"       | .625" | 1.85" | 4.15" | None                        |

Additional sizes available upon request!

Made in the USA!

Contact for quotes and lead times:  
**Charlie Johnpeter**  
**630.888.4124 • charlie@abjsales.com**  
**www.abjsales.com**

